




UTP 5070

RF ADAPTER

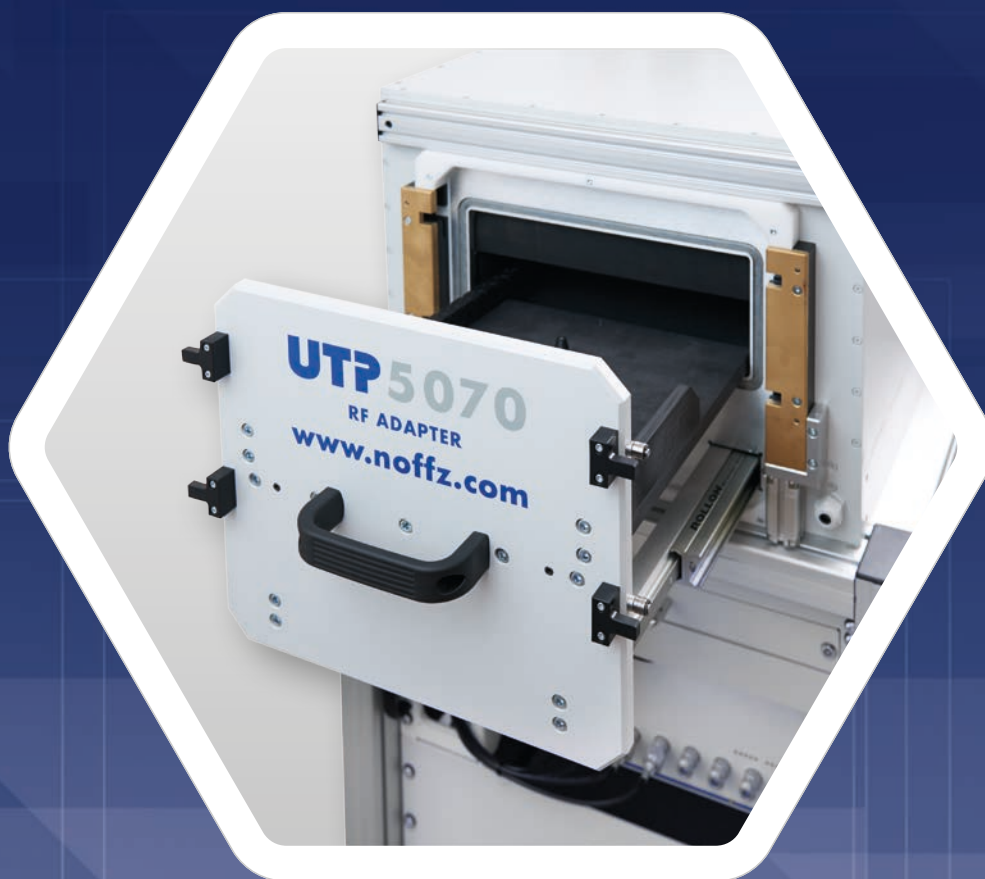

PRODUCT

Applications: Production Test Systems, Development Test Systems



SIEMENS



Management System
ISO 9001:2008
www.noffz.com
ID: 9105011383




FAST > FLEXIBLE > FOCUSED



UTP 5070 RF ADAPTER

- › RF-shielded chamber
- › Pneumatic drawer
- › Shielding effectiveness > 60 dB within 0.68 ... 6 GHz
- › Drawer with handgrip and precision telescopic rails
- › Feedthrough for various connectors

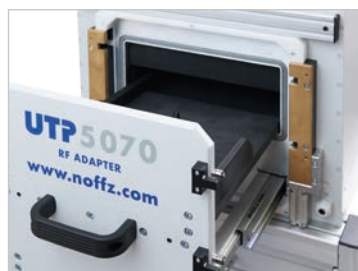

UTP 5070 RF Adapter



TECHNICAL DATA

UTP 5070 RF Adapter

Mechanics

Housing	470 x 370 x 370 (W x H x D)
Weight	Ca. 40 kg, depending on pneumatics and number of connectors

RF characteristics

Frequency range	0.68 ... 6 GHz
Shielding effectiveness	> 60 dB
Reflexion compensation	Multi-layer absorber for ideal return loss characteristics inside the chamber
Test antenna	Optionally integrated antenna coupler for a variety of communication standards
Test signal propagation	Optionally integrated signal distribution and conditioning components
Communication interfaces	Customer specific filtered interfaces
	Customer specific automated DUT adaption

Other features

Bracket / Holder for scanner and sensors	Yes
Safety switch	Yes, top / back additional safety on request
Finish	ESD Finish / RAL7035
Feedthrough connectors	USB, LAN, power, analog lines, digital lines, pneumatics